

# SMARTRAK® 2.0

Cost effective  
Assemble friendly  
Flat-packed for shipping

Smartrak® 2.0 is an improved multi-purpose rack system that is scalable and flexible for all kinds of Data Center and Lan applications.

The cabinet is strong and versatile for large cable management from top or bottom.




Heavy duty castor wheels with adjustable feet



Robust swing handle lock set



Fan tray(Annex A)



Cable Tray(Annex B)

## FEATURES

- Static Weight Load of 1500KG.
- Full height door for better ventilation.
- 3 times bend panel mounting for a stronger structure.
- Save assembly time with flat packs with the new simplified design with lesser parts to fix.
- 7 Heights – 27U, 32U, 36U, 42U,45U,47U,48U, 50U and 52U (other height available)
- 2 Widths – 600mm and 800mm (other width available)
- 4 Depths – 800 mm,1,000mm,1,100mm and 1,200mm (other Depth available)

## ORDERING INFORMATION

SmartRak 2.0 Part Number Table for a Fully assembled racks (Black)


Height `U`	Width & Depth									
	600 x 600	600 x 800	600 x 1000	600 x 1100	600 x 1200	800 x 600	800 x 800	800 x 1000	800 x 1100	800 x 1200
27U	SR27606BVA	SR27608BVA	SR27610BVA	SR27611BVA	SR27612BVA	SR27806BVA	SR27808BVA	SR27810BVA	SR27811BVA	SR227812BVA
32U	SR32606BVA	SR32608BVA	SR32610BVA	SR32611BVA	SR32612BVA	SR32806BVA	SR32808BVA	SR32810BVA	SR32811BVA	SR327812BVA
42U	SR42606BVA	SR42608BVA	SR42610BVA	SR42611BVA	SR42612BVA	SR42806BVA	SR42808BVA	SR42810BVA	SR42811BVA	SR427812BVA
45U	SR45606BVA	SR45608BVA	SR45610BVA	SR45611BVA	SR45612BVA	SR45806BVA	SR45808BVA	SR45810BVA	SR45811BVA	SR457812BVA
47U	SR47606BVA	SR47608BVA	SR47610BVA	SR47611BVA	SR47612BVA	SR47806BVA	SR47808BVA	SR47810BVA	SR47811BVA	SR477812BVA
48U	SR48606BVA	SR48608BVA	SR48610BVA	SR48611BVA	SR48612BVA	SR48806BVA	SR48808BVA	SR48810BVA	SR48811BVA	SR487812BVA
52U	SR52606BVA	SR52608BVA	SR52610BVA	SR52611BVA	SR52612BVA	SR52806BVA	SR52808BVA	SR52810BVA	SR52811BVA	SR527812BVA

## SmartRak® 2.0 - Dimensions and mounting positions

Height (U)	H (mm)
27	1,296.55
32	1,518.80
42	1,961.70
45	2,095.05
47	2,183.95
48	2,228.40
52	2,408.80

Depth (mm)	P~P
600	340.00
800	530.00
1000	740.00
1100	740~840
1200	740~940

Width (mm)	W (mm)
600	600
800	800

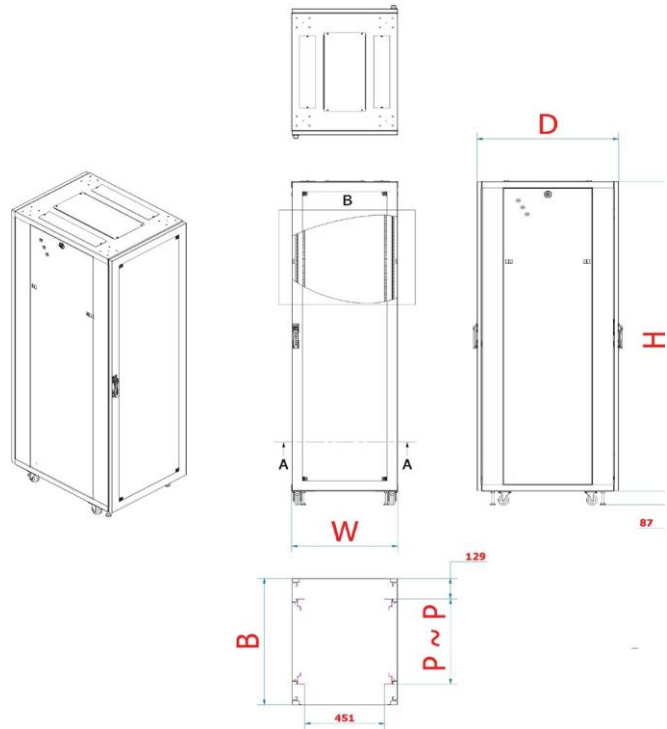

## Standards

- IEC 297-2
- DIN 41494, part 7
- DIN 41491, part 1 (mounting dimension)
- EN 60950
- VDE 0100
- EIA-310-D
- BS 5954-2 (Design and Conformance)
- 1U = 44.45mm

